


# UFA210A

## UTiFLEX®



UFA210A is the ideal coaxial solution for high-frequency applications in aerospace, defense, and advanced test systems. Its robust construction and reliable electrical performance make it perfect for use in radar systems, electronic warfare platforms, and space-constrained test environments. When design demands consistent performance under pressure, trust UTiFLEX® to deliver.

### Details and Materials

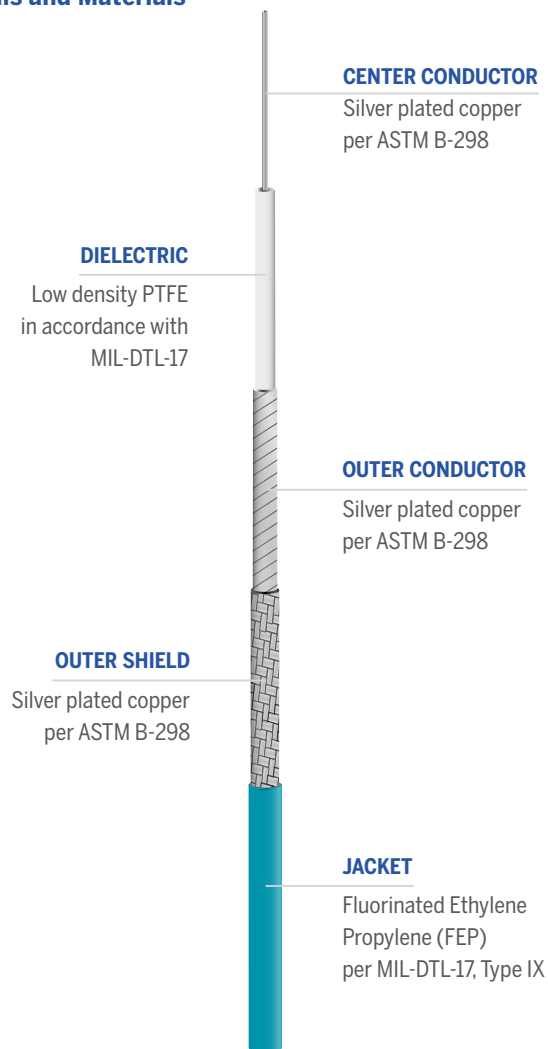

 **Impedance**  
50 Ohms

 **Operating Temperature**  
-65°C to +125°C

 **RoHS**  
Compliant

### Mechanical/Physical Properties

Center Conductor Diameter	in	0.0551
	mm	1.40
Dielectric Diameter	in	0.160
	mm	4.06
Outer Conductor Diameter	in	0.1670
	mm	4.24
Outer Shield Diameter	in	0.186
	mm	4.72
Jacket Diameter	in	0.210
	mm	5.33
Jacket Wall Thickness	in	≥ 0.012
	mm	≥ 0.305
Weight	grams/ft	≤ 22.0
	grams/m	≤ 72.2
Min Static Bend Radius	in	0.380
	mm	9.65
Flex Life - Snake <sup>3</sup>	cycles	100,000
Center Conductor Strands		1

### Electrical Properties

Velocity of Propagation	(%)	77
RF Shielding	(dB) at 1 GHz	≥ 100
Capacitance	pF/ft	26.45
	pF/m	86.79
Maximum Frequency	GHz	26.5
Corona Extinction Voltage	VRMS @ 60Hz	2000
Dielectric Withstanding Voltage	VRMS @ 60Hz	5000
Insertion Loss Stability	% Change <sup>2</sup>	≤ 5
K1	Ft (m)	7.33 (0.240)
K2	Ft (m)	0.39 (0.013)

# UFA210A

UTiFLEX®

## Maximum Attenuation<sup>1</sup>, Power, and VSWR<sup>6,7</sup> (at 20°C and Sea Level)

Frequency GHz	Attenuation dB/100ft	dB/m	Power Watts (CW)	VSWR
0.5	5.4	0.18	1429	≤ 1.25:1
1	8.0	0.26	999	≤ 1.25:1
5	18.4	0.60	427	≤ 1.25:1
10	27.0	0.89	292	≤ 1.25:1
18	39.0	1.28	210	≤ 1.25:1
26.5	49.0	1.61	168	≤ 1.25:1


## Environmental Properties

Thermal Shock	MIL-STD-202, Method 107, 20 Cycles, -65 to 125 °C (cable and SMA connectors only)
Aging Stability	MIL-DTL-17, Paragraph 4.8.16, +125 °C for 168 hours (cable and SMA connectors only)
Vibration	MIL-STD-202, Method 204, Test Condition B
High Pressure	Pressure increased ≤ 10 bar/min to 100 +/- 2 bar for 12 hrs.
Humidity	MIL-STD-810, Method 507.6, Procedure I and II
Salt Fog	MIL-STD-810, Method 509, Procedure I
Sand and Dust	MIL-STD-810, Method 510, Procedure I
Stress Crack Resistance	MIL-DTL-17, Paragraph 4.8.17
Cold Bend Test	MIL-DTL-17, Paragraph 4.8.19
Outgassing	Less than 1% TML and 0.1% CVMCM
Radiation Resistance	30 Mrads
Flammability	14 CFR Part 25, Appendix F, Part I (b) (7), 60° flammability test


## Notes

1. Maximum Attenuation (db/100Ft) = K1VF + K2F where F is Frequency in GHz
2. Insertion Loss change, while vibrated at a frequency of 6 Hz and an amplitude of 1 inch
3. 3-ft sample. One end is fixed and the other end is moved inward along the axis of the sample for 1.5 ft forcing the cable into a "U" shape and then returns to straight configuration for one flex cycle.
4. Typical phase change vs bending for cable wrapped 360° around a 4.5 in diameter mandrel
5. Cable assemblies of equal length and connectors made from the same cable manufacturing lot shall phase track within 200 PPM of each other
6. Test Plots required with Shipment (Attenuation and VSWR)
7. VSWR testing to be performed on - foot minimum lengths with gating used to remove connector contributions. Minimum frequency points shall be 1601.


## Typical Phase Change vs. Temperature<sup>5</sup>

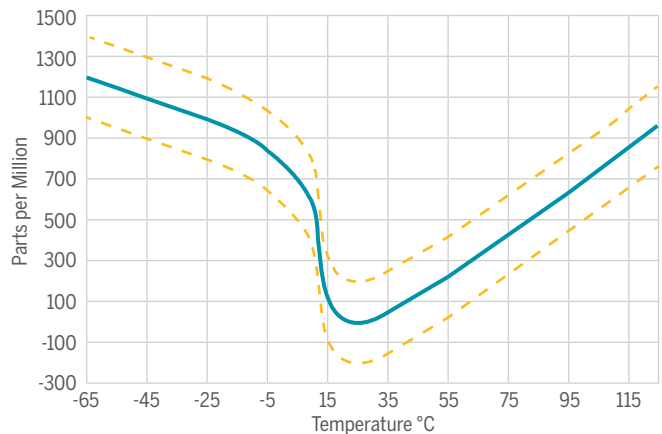

## Typical Phase Change Window vs. Bending<sup>4</sup>

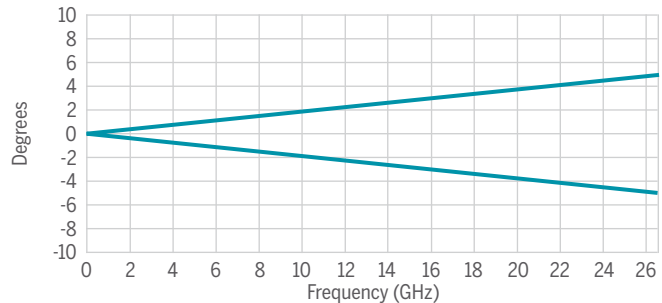

## Maximum Insertion Loss

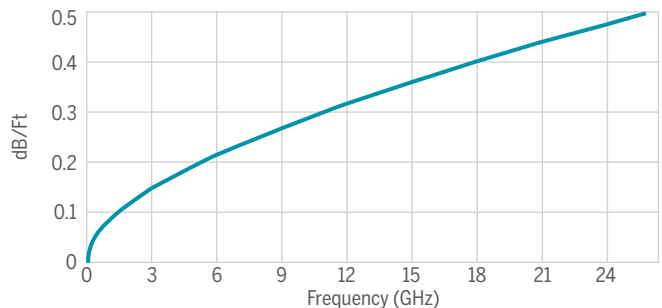

## Maximum Power Handling

