


AccuPhase[®] 26.5

UKR300C



AccuPhase26.5 test cable assemblies represent the best in microwave cable technology. We fit AccuPhase26.5 with an additional highly flexible and abrasion-resistant ruggedization. Ideal choice for test labs or any testing environment requiring excellent mechanical strength and long-term reliability in a compact package. Our product has passed strenuous lifetime qualification testing to ensure long-term reliability. Also features excellent crush, torque, and kink resistance. Available with a variety of connectors capable of operating up to 26.5-GHz, ideally suited to the demanding requirements of today's test environments.

Details and Materials

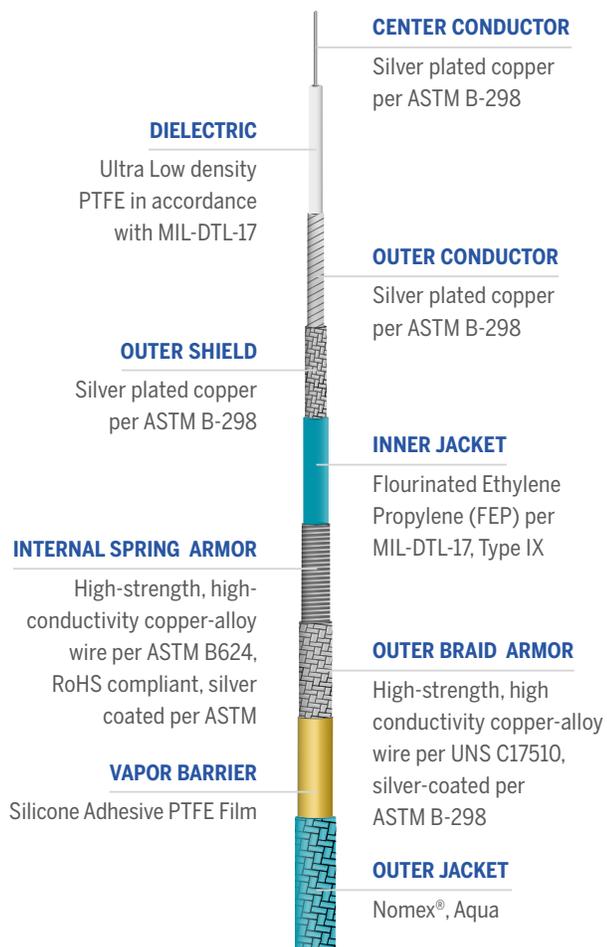

Impedance 50 Ohms |
 Operating Temperature -65°C to +165°C |
 RoHS Compliant

Mechanical/Physical Properties

Jacket Diameter	in	0.300
	mm	7.62
Weight	grams/ft	≤ 51
	grams/m	≤ 167.3
Min Static Bend Radius	in	1.5
	mm	38.1
Crush Resistance	lbs/in	≥ 250
Flex-Life-Snake ³	cycles	200,000
Center Conductor Strands		7

Electrical Properties

Velocity of Propagation	(%)	81.5
RF Shielding (1-18 GHz with connectors shielded)	dB	≥ 90
Capacitance	pF/ft	26.9
	pF/m	88.2
Cutoff Frequency	GHz	26.5
Corona Extinction Voltage	VRMS @ 60Hz	3500
Dielectric Withstanding Voltage	VRMS @ 60Hz	5000
Insertion Loss Stability	% Change ²	≤ 5
K1	Ft (m)	8.02 (0.263)
K2	Ft (m)	0.11 (0.004)


Maximum Attenuation¹, Power, and VSWR⁵ (at 20°C and Sea Level)

Frequency GHz	Attenuation dB/100ft	dB/m	Power Watts (CW)	VSWR
0.5	6	0.19	1357	≤ 1.25:1
1	8	0.17	957	≤ 1.25:1
5	19	0.61	422	≤ 1.25:1
10	27	0.87	296	≤ 1.25:1
18	36	1.18	218	≤ 1.25:1
26.5	44	1.45	178	≤ 1.25:1


AccuPhase 26.5

UKR300C


Maximum Insertion Loss

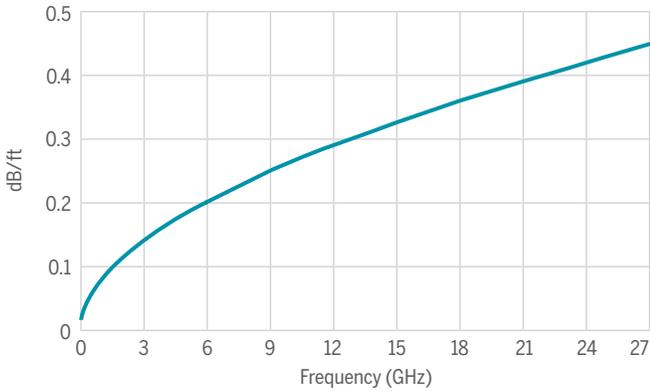


Typical Phase Change vs. Bending⁴

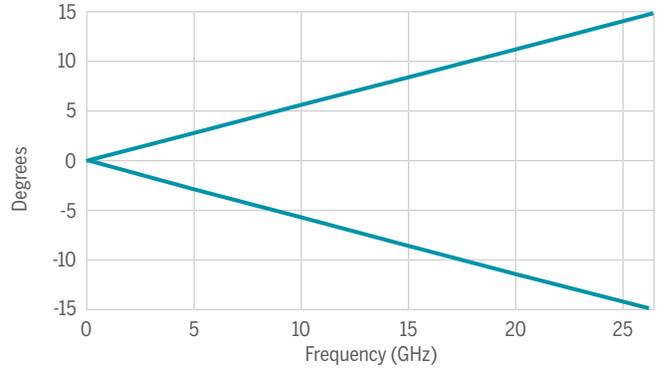

Typical Phase Change vs. Temperature

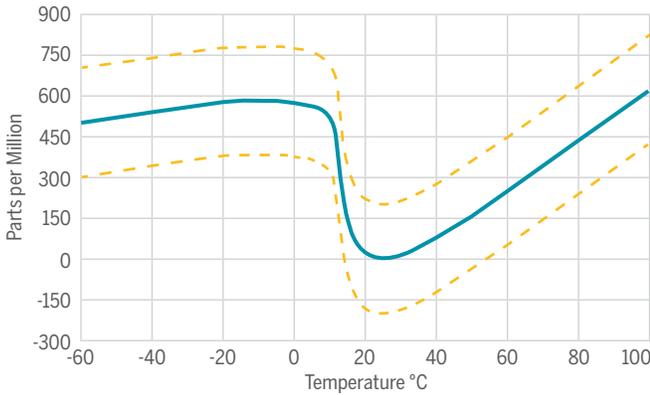

Maximum Power Handling

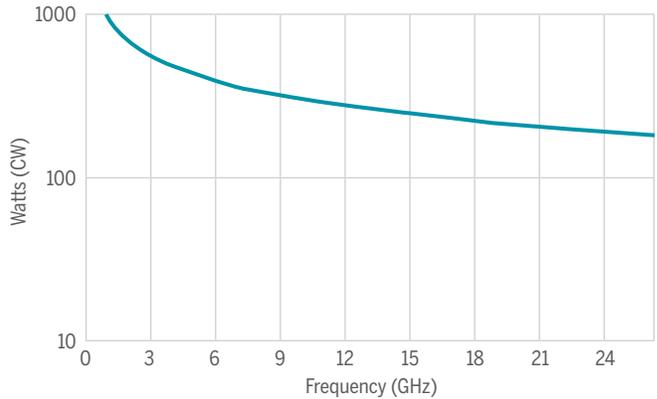

Connectors

Description	Part Number	Rated Frequency (GHz)	Max VSWR (per connector)
Precision 3.5mm Plug	000	26.5	1.20:1
Precision 3.5mm Jack	010	26.5	1.20:1
HF SMA Plug	300	26.5	1.20:1
HF SMA Jack	310	22	1.22:1
Precision N Plug	50U	18	1.16:1
Precision N Jack	510	18	1.16:1
Precision TNC Plug	60U	18	1.20:1
Precision TNC Jack	610	18	1.20:1
N Plug	70U	12.4	1.16:1
N Jack	710	12.4	1.16:1

Notes

1. Maximum Attenuation (db./100Ft) = K1√F + K2F where F is the Frequency in GHz.
2. Insertion Loss change, while vibrated at a frequency of 6 Hz and an amplitude of 1 inch.
3. Connect both ends of cable to flex (snake) machine. The movement of the flex machine arm from 36 to 18 inches, stopping, and then returning to 36 inches shall be 1 flex cycle.
4. Typical phase change vs bending for cable wrapped 360° around a 4.5 in diameter mandrel.
5. Test Plots required with Shipment (Attenuation and VSWR).